



# TLBE-ST

Head Shredder for excavator and telescopic arm




The TLBE-ST shredding head is perfect for crushing grass, canes and shrubs generally up to 7 cm, located near ditches, banks, and all sorts of very steep lands. It can be applied to excavator weighing from 5 tonnes and mainly to telescopic arms.

Mod.											
	B	L	Kg	(g/min.)	L/1'	Press. BAR	kit		rotore mm		
TLBE-ST 100	1150	1040	310	2000	50/60	220/250	10	10	7	140	3
TLBE-ST 110	1250	1140	330	2000	60/70	220/250	11	11	8	140	3
TLBE-ST 120	1350	1240	350	2000	60/70	220/250	12	12	8	140	3

The technical data, specifications, characteristics and pictures are not binding for the manufacturer.

## STANDARD EQUIPMENT

- Linkage device
- **Hydraulic motor group 3**
- Valve anti-cavitation
- Belt drive
- Rotor with toothed hammers (on request smooth hammers)
- Internal counterframe
- Counterblades double series
- Front safety with zinc-plated flaps
- Rear safety in rubber and rubber
- Lateral skids
- Rear adjustable roller with scraper
- Special paint powder or liquid (Primer and enamel)

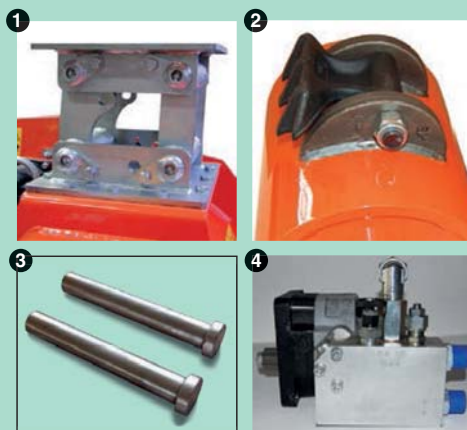

## ACCESSORIES ON REQUEST

- 1 Oscillating saddle as a replacement of standard linkage
- 2 Reinforced support hammer
- 3 Safety pin saddle
- 4 Pressure relief valve with flow regulator addition

